


# M 24 SLD G FT

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	84Ah
Capacity at C/20	73.6Ah
Weight	53.6 Lbs. (24.3 kg)
Plate Alloy	Lead Calcium
Posts	Forged terminals & bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) – 140°F (60°C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.30 - 2.35 VPC
Float	2.25 - 2.30 VPC
Vent	Self-sealing (2 PSI operation)
Electrolyte	Sulfuric acid thixotropic gel
Resistance	4.0 Milliohms (full charge)
Terminal	FEM. 1/4"



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A by East Penn Manufacturing


Valve-Regulated, Gelled-Electrolyte Battery



## DIMENSIONS

Length (mm)	10.25 (260 mm)
Width (mm)	6.75 (171 mm)
Height (mm)	8.25 (210 mm)

## Cycling Ability

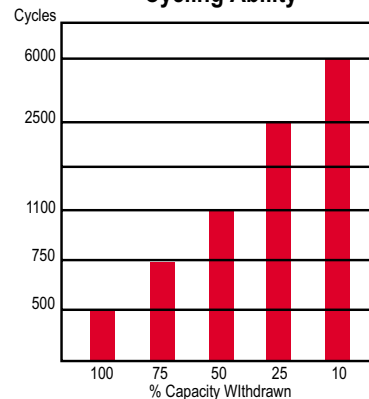

Number of cycles vs. depth of discharge at +20°C discharge with 20 hour rate

**MK Battery**

1645 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-Mail: sales@mkbattery.com

