

Nominal Voltage _____ 12 volts

Amp hour capacity at 20 hour rate _____ 43 amp hour

Cranking amps at 68°F (20°C) _____ 850 amps

Cranking amps at 32°F (0°C) _____ 700 amps

Cranking amps at 0°F (-17°C) _____ 550 amps

Dimensions (inches) _____ Length=9.78*, Width= 5.17, Height= 6.83*

Dimensions (mm) _____ Length=249, Width=132, Height=174

Weight _____ 32 pounds / 14.5 kilograms

Recommended charge voltage _____ Bulk Charge 14.2 – 14.6 volts

_____ Absorption/Acceptance Charge 14.2 – 14.6 volts

_____ Float Charge 13.1 to 13.4 volts

Recommended Charge Amperage _____ Up to 100% of the rated amp hour capacity


Self Discharge Rate _____ 2% per month at 77°F (25°C)

Operating Temperature _____ -50° to 150° F (-45 to 65.5 C)

Cycle life _____ 1,100 cycles to 50% DOD, 500 cycles to 100% DOD

Warranty _____ Refer to manual for warranty information by application



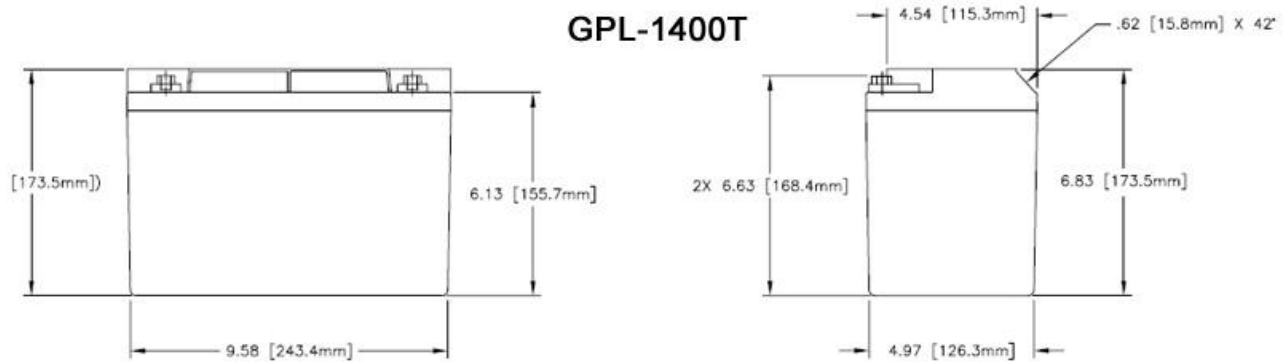

* All dimensions are overall. This will include handles and terminals. Actual case size may be smaller than published.

